



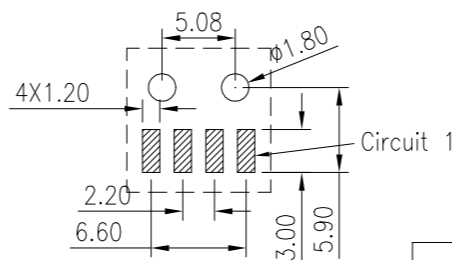
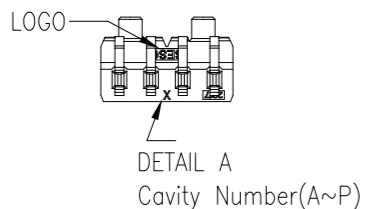


RoHS

This products can apply to the SESO Doc NO. QA-3-04-005
of Environmental&Material Management Rules

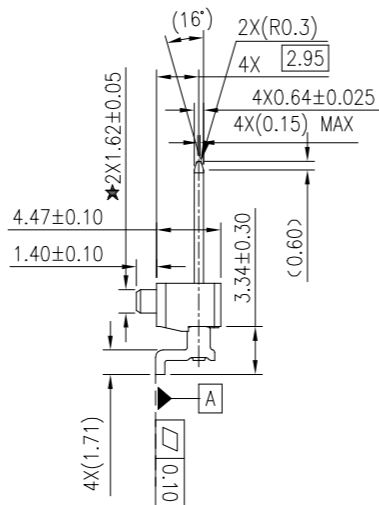

3D DRAWING
SCALE 1:1

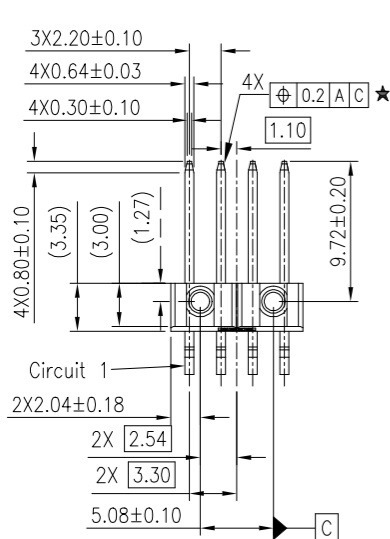

RECOMMENDED P.C.B LAYOUT
(TOLERANCE:±0.05)

Specifications :

- Voltage rating: 250V Max. AC/DC
- Current rating: 3 A Max. AC/DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -40°C~+125°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤40mΩ
- Material(Pin): Brass C2600
- Symbols for SPC dimensions: " ★ "
- Product Specification: PS-2217-01
- Packaging: see SESO drawing
PK-2217W-B0402-02H00

2217 W - B 04 02 - 02 H 00
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.:2217
- ② Category:W-Wafer
- ③ Connector Type:B-Single-row 90° SMT
- ④ Row No.-Pin No.:04-04Pin
- ⑤ Plastic Material:02-PA9T (UL94V-0)
- ⑥ Plating Code:02-
Underplate:NI 40~88u"(1.0~2.2um) overall
Top Plating:Sn 40~120u"(1.0~3.0um) overall
- ⑦ Environmental code:H-RoHS
- ⑧ Special code:
00-Black color,Packing:Reel

NO.	DESCRIPTION	MATERIAL	COLOR
1	HOUSING	PA9T GN2330	BLACK
2	TERMINAL	BRASS C2600	/

GENERAL TOLERANCE						PART NO.			
.X ±0.35						2217W-B0402-02H00			
.XX ±0.25						TITLE			
.XXX±0.15						2.20mm Pin Header Connectors			
X: ±2°						UNIT	SCALE	SHEET	REV
PROJECT						mm	1:1	1/1	AO
20250528	A0	/	Official Release	Kian	Joshua Liu	APPROVAL	CHECK	DRAWN	DATE
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	Jack Zhang	Joshua Liu	Kian	2025/05/28